

VISION

retigo®



Blue Vision 2021 i, b

Orange Vision 2021 i, b

General characteristic

- **VISION TOUCH** - Control touch panel
- Massive and two positions door handle for comfortable and safety manipulation
- Curved door glass with cool down function
- Hygienic cooking chamber with rounded inside corners
- Even baking thanks to the bi-directional fan
- Perfect illumination of the cooking chamber by means of halogen lights
- Double glass door that limits the escape of heat
- Run-off tray under the door for collecting condensed water
- Removable door seal
- WSS - water saving system prevents high water consumption in all cooking modes
- Two position door catch (safety position)
- Integrated shower for easy cleaning which does not use softened water
- **SDS** - service and diagnostic system- automatic evaluation of microprocessor error reports
- **IPXS** shield
- **BCS** - boiler control system*
- **CCS** - calcium control system*
- Loading rack as a standard accessory

* - valid for boiler combi steamers

Models characteristic

B 2021 i, b

- **EASY COOKING** - Fast and simple control
- **VISION AGENT** - Virtual help-mate
- **ACTIVE CLEANING** - Automatic cleaning system
- Coloured touch screen display
- Hot air 30 - 300 °C
- Combination 30 - 300 °C
- Steaming 99 - 130 °C
- Bio steaming 30 - 98 °C
- 4 point temperature core probe
- Curved glass - helps to cool down the outer door glass
- Delta T cooking, steaming
- Low temperature roasting
- Cook Et Hold
- Regeneration
- Banquet system
- Programming - up to 1000 programs with 20 steps
- 5 speed ventilator
- Ventilator fan timing
- Separate rack timing
- Learn function
- Fan Stop - immediate stop of ventilator when doors opened
- Automatic preheating/cooling
- Autoclimate - steam saturation control
- Automatic start
- QuickView - fast program overview
- Flap valve
- ACM (Automatic Capacity Management)
- Energy logic
- Double glass doors preventing heat escape
- Turbo steam function - fast steam
- USB Plug-in
- LAN - internet communication channel

i - injection, b - boiler

O 2021 i, b

- **VISION TOUCH** - Touch control panel
- Digital control display
- Hot air 30 - 300 °C
- Combination 30 - 300 °C
- Steaming 99 - 130 °C
- Bio steaming 30 - 98 °C
- Regeneration
- Curved glass - helps to cool down the outer door glass
- 5 programs with 5 steps
- 1 speed ventilator
- Automatic preheating/cooling
- Automatic start
- Energy logic
- Double glass doors preventing heat escape
- USB Plug-in
- LAN - internet communication channel
- **Optional**
- Flap valve
- Temperature Core probe
- Software extension - 99 programs with 5 steps

i - injection, b - boiler


Optional Accessories - Retigo Vision 2021 i, b

- VO 2021 R - spare loading trolley
- VO 2021 B - banquet loading trolley for 118 or 96 plates
- TO 2021 B - Thermo cover for VO 2021 B
- TO 2021 R - Thermo cover for VO 2021 R
- Loading ramp

T O U C H T H E F U T U R E

Model **B 2021 i, b** - **O 2021 i, b**

drawings

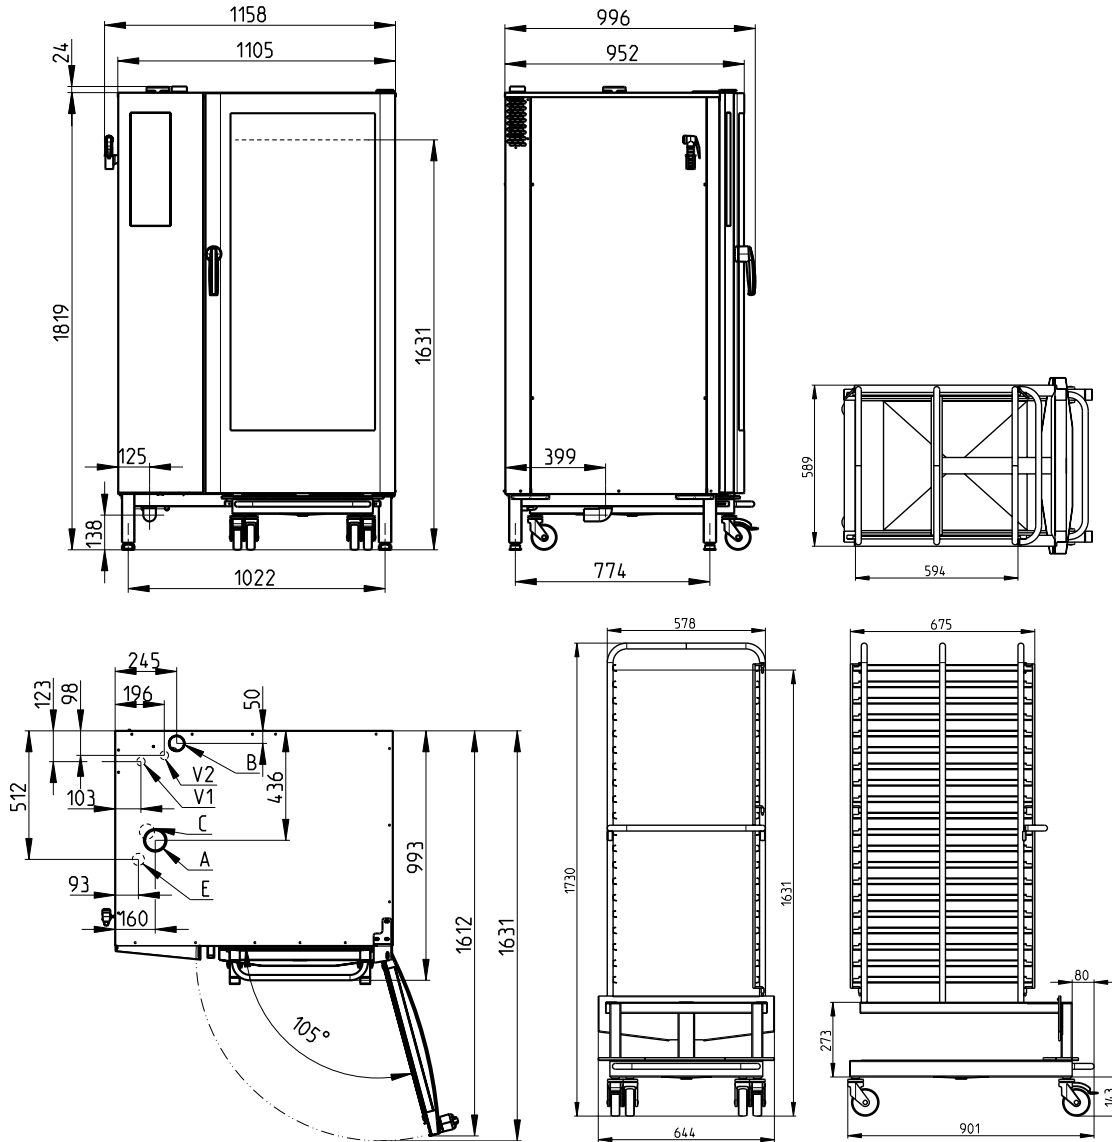

A - flap valve, B - chimney, C - drain, E - electricity, V1 - untreated water, V2 - treated water

Model **2021**

B 2021 i; O 2021 i

B 2021 b; O 2021 b

technical data

Energy	electricity	electricity
Steam generation	injection	boiler
Capacity	20 trays GN2/1	20 trays GN2/1
Capacity of meals	500 - 900	500 - 900
Spacing [mm]	65	65
Dimensions (W x H x D) [mm]	1105 x 1841 x 952	1105 x 1841 x 952
Weight	330 kg	344 kg
Total power	59,4 kW	59,4 kW
Steam generation power		48 kW
Fuse protection	100 A	100 A
Voltage	3 N~/400 V/50 Hz	3 N~/400 V/50 Hz
Water connection / drain [mm]	G 3/4" - / 50	G 3/4" - / 50
Temperature	30 - 300 °C	30 - 300 °C

Size	Model	Technical specification
2021	B2021i	E2021IA
	O2021i	E2021IZ
	B2021b	E2021BA
	O2021b	E2021BZ

retigo®

RETIGO Ltd.
Láň 2310, PS 43
Rozňov pod Radhoštěm
Czech Republic
tel.: +420 571 665 511
fax: +420 571 665 554
e-mail: sales@retigo.com
www.retigo.com

vision